
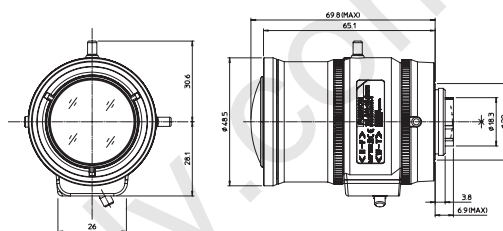


HD Vari-Focal (4-15.2mm)

DV3.8x4SR4A-1

3.8x Applicable camera (model) 1 2/3 1/2 1/3 1/4 For Security



Unit : mm

DV3.8x4SR4A-1

Focal Length (mm)			4 - 15.2 (3.8x)
Iris Range			F1.5 - T360
Operation	Zoom		Manual
	Focus		Manual
	Iris		Manual
Angle Of View (H×V)	1/1.18"	WIDE	103°27' × 77°03'
		TELE	27°23' × 20°34'
	1/2"	WIDE	92°42' × 69°08'
		TELE	24°38' × 18°29'
	1/3"	WIDE	69°08' × 51°40'
		TELE	18°29' × 13°53'
1/4"	WIDE	51°40' × 38°41'	
	TELE	13°53' × 10°25'	
Angle Of View (H×V)	1/1.18"	WIDE	113°02' × 62°46'
		TELE	29°48' × 16°49'
Aspect Ratio 16 : 9	1/2"	WIDE	101°14' × 56°21'
		TELE	26°49' × 15°07'
	1/3"	WIDE	75°25' × 42°09'
		TELE	20°08' × 11°21'
1/4"	WIDE	56°21' × 31°34'	
	TELE	15°07' × 8°31'	
Focusing Range (From Front Of The Lens) (m)			∞ - 0.3
Object Dimensions at M.O.D. (H×V) (mm)	1/1.18"	WIDE	801 × 502
		TELE	153 × 114
	1/2"	WIDE	662 × 434
		TELE	138 × 103
	1/3"	WIDE	434 × 305
		TELE	103 × 77
1/4"	WIDE	305 × 221	
	TELE	77 × 57	
Object Dimensions at M.O.D. (H×V) (mm) Aspect Ratio 16:9	1/1.18"	WIDE	957 × 384
		TELE	168 × 93
	1/2"	WIDE	770 × 338
		TELE	150 × 84
	1/3"	WIDE	488 × 243
		TELE	112 × 63
	1/4"	WIDE	338 × 178
		TELE	84 × 47
Back Focal Distance (in air) (mm)			11.01
Exit Pupil Position (From Image Plane) (mm)			180
Filter Thread (mm)			—
Mount			C
Mass (g)			115
Remarks			•With Metal Mount

[Lens Image]

4mm



15.2mm

